


IG413C

INDUSTRIAL RANGE
POWER BY CUMMINS

IGNT

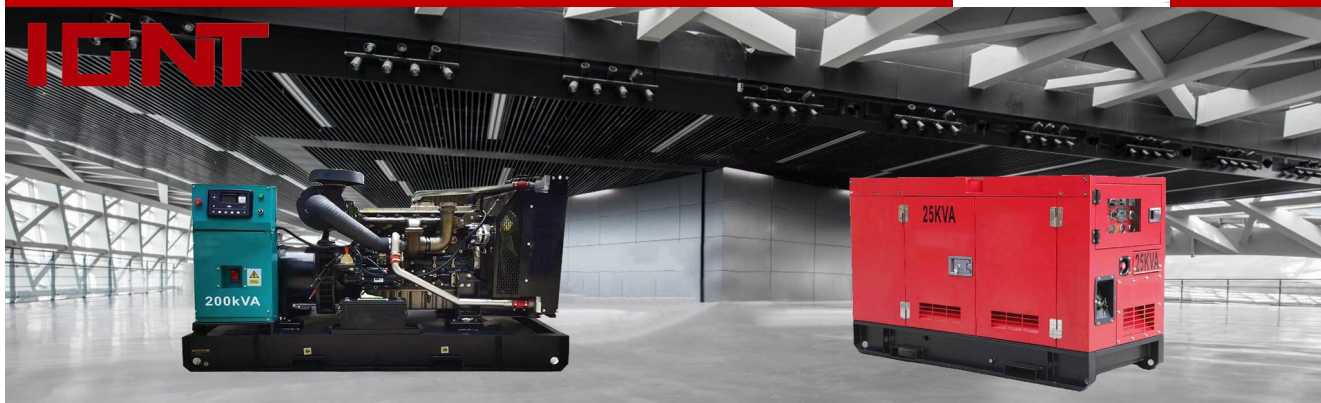

POWER DEFINITION

PRP: Prime Power is required for continuous operation under variable load and infinite operating hours per year.

ESP: Standby power refers to the ability of the generator to operate at varying loads in the event of power outage, with an annual operating time of up to 200h.

STANDARD USAGE CONDITIONS:

1. Altitude: below 1000 meters;
2. Environmental temperature: 25 °C
3. Relative humidity: 30%

ABOUT NOISE:

The noise level of the generator largely depends on the installation conditions and usage environment, so it is not possible to specify the noise value in manual. The noise value we provide is based on laboratory testing and is for reference.

QUALIFICATION STANDARD

IGNT POWER generator set complies with ISO and CE standards, which also include the following certification standards:

- ISO 1400:2015 Environmental System;
- ISO 45001:2018 Safety System;
- ISO 9001:2015 Quality System

SERVICE		PRP	ESP
Power	KVA	375	413
Power	KW	300	330
Standard Voltage	V	400/230	
Available Voltage	v	380/220	415/240
Rated Current	A	541	
Frequency/Speed	HZ/RPM	50/1500	

Weight and Dimension

Dimension			Open	Silent
Length	(L)	mm	3400	4590
Width	(W)	mm	1370	1600
Height	(H)	mm	2150	2500
Net Weight	KG			
Fuel Tank	L		1015	

IG413C

INDUSTRIAL RANGE
POWER BY CUMMINS

IGNT

Engine Specifications

General Engine Data -- CUMMINS CCEC		
Engine Model	KTA19-G2	
Governer	E	
Cycle	4 stroke	
No. of Cylinders	6	
Displacement (L)	18.9	
Bore* Stroke (mm)	159*159	
Compression Ratio	13.9	
Rated Net Power(KW)	300	
Induction system	Turbocharged & Aftercooled	

Air intake system		
Clean filter	kPa	254
Dirty filter	kPa	635
Air Filter	/	

Lubrication System		
Max. oil temperature	°C	121
Total System Capacity	L	50
Idle speed	kPa	138

Alternator Specifications

Alternator Date-- IGNT		
Alternator Model	IA444FS	
Phase	3	
Voltage (V)	400	
Prime Power (KW)	300	
Pole	4	
Excitation System	lf-excited, Brushless	
No. of Bearing	1	
Power Factor	0.8	
Wiring Connection	3 Phases, 4 Wires	
Insulation Grade	H/H	
Protection Grade	IP23	
Voltage Regulation (%)	±0.5	

Fuel System		
Clean Fuel Filter	mm	102
Dirty Fuel Filter	mm	203
Maximum Allowable	mm	165
Maximum Fuel Flow	liter/hr	394
Fuel Tank Capacity (Open)	/	
Type Injection System	Cummins PT	

Starter System		
Start Motor Voltage	V	24
No. of Batteries	2	

Cooling System		
Coolant capacity-engine only	L	30
Thermostat adjusting temperature	°C	82-93
Maximum Coolant Friction Head	kPa	55
Min. Pressure Cap	kPa	69

Exhaust system		
Center of Gravity from Rear	mm	721
Center of Gravity Above Crankshaft Cent.	mm	229
Max back pressure	mm	76

Alternator Date-- Stamford		
Alternator Model	S4L1D-F41/S4L1S-F4	
Phase	3	
Voltage V	400	
Prime Power KW	300	
Pole	4	
Excitation System	elf-excited, Brushless	
No. of Bearing	3	
Power Factor	0.8	
Wiring Connection	3 Phases, 4 Wires	
Insulation Grade	H/H	
Protection Grade	IP23	
Voltage Regulation %	±0.5	

IG413C

INDUSTRIAL RANGE
POWER BY CUMMINS

IGNT

Controller Specifications

Control Panel Date-- Deepsea DSE6120

- | | |
|--|--|
| ● Built in PLC logic programming | ● Generator/load current monitoring and protection |
| ● Generator voltage detection | ● Fuel pump control function |
| ● Mains voltage detection | ● Can connect to all expansion modules |
| ● Generator/load power detection (kW, kVA, kVAr, pf) | ● Capable of graded loading |
| ● Generator overload protection (kW) | ● Engine speed protection |
| ● Equipped with manual closing and opening functions | ● Engine preheating |
| ● Start gen-set when the battery voltage is low | ● Engine starts rapidly&stops rapidly |
| ● LCD and LED alarm indication | ● Custom remote start signal |

Generator Specifications

Standard Configuration

- 50°C radiator for belt driven fan
- 12/24V charging alternator
- One set of air/fuel/oil filters
- Chassis with integrated fuel tank
- Emergency stop button
- Anti-vibration shock absorbers
- Main circuit breaker/ MCCB
- Auto control system
- User manual

Optional Configuration

- Battery charger
- Engine pre-heater
- Alternator pre-heater
- PMG/ AREP/ MAUX
- Water-oil separator
- Inside automatic transfer switch/ ATS box
- Grounding copper rod
- Remote control system
- Switch box

Warranty of Generator Set

Cummins Engine

One year or 1000 running hours whichever comes first

Generator

One year or 1000 running hours whichever comes first

Email: ignt@igntpower.com

Web: www.igntpower.com