


IG1375C

INDUSTRIAL RANGE
POWER BY CUMMINS

IGNT

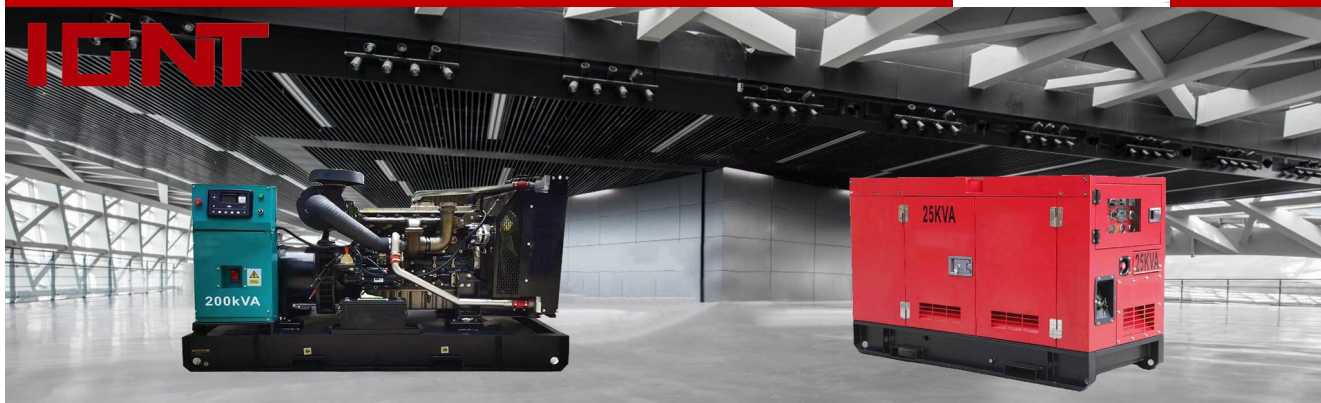

POWER DEFINITION

PRP: Prime Power is required for continuous operation under variable load and infinite operating hours per year.

ESP: Standby power refers to the ability of the generator to operate at varying loads in the event of power outage, with an annual operating time of up to 200h.

STANDARD USAGE CONDITIONS:

1. Altitude: below 1000 meters;
2. Environmental temperature: 25 °C
3. Relative humidity: 30%

ABOUT NOISE:

The noise level of the generator largely depends on the installation conditions and usage environment, so it is not possible to specify the noise value in manual. The noise value we provide is based on laboratory testing and is for reference.

QUALIFICATION STANDARD

IGNT POWER generator set complies with ISO and CE standards, which also include the following certification standards:

- ISO 1400:2015 Environmental System;
- ISO 45001:2018 Safety System;
- ISO 9001:2015 Quality System

SERVICE		PRP	ESP
Power	KVA	1250	1375
Power	KW	1000	1100
Standard Voltage	V	400/230	
Available Voltage	v	380/220	415/240
Rated Current	A	1804	
Frequency/Speed	HZ/RPM	50/1500	

Weight and Dimension

Dimension			Open	Silent
Length	(L)	mm	5000	12192
Width	(W)	mm	2000	2438
Height	(H)	mm	2500	2591
Net Weight	KG			
Fuel Tank	L			

IG1375C

INDUSTRIAL RANGE
POWER BY CUMMINS

IGNT

Engine Specifications

General Engine Data -- CUMMINS CCEC		
Engine Model	KTA50-G3	
Governer	E	
Cycle	4 stroke	
No. of Cylinders	16	
Displacement (L)	50.3	
Bore* Stroke (mm)	159*159	
Compression Ratio	13.9	
Rated Net Power(KW)	1000	
Aspiration	Turbocharged	

Air intake system		
Clean filter	kPa	15
Dirty filter	kPa	25
Intake air flow	L/s	1605

Lubrication System		
Max. oil temperature	℃	121
Idle speed	kPa	138
Rated speed	kPa	345-483

Alternator Specifications

Alternator Date-- IGNT		
Alternator Model	IA634G	
Phase	3	
Voltage (V)	400	
Prime Power (KW)	1000	
Pole	4	
Excitation System	lf-excited, Brushless	
No. of Bearing	1	
Power Factor	0.8	
Wiring Connection	3 Phases, 4 Wires	
Insulation Grade	H/H	
Protection Grade	IP23	
Voltage Regulation (%)	±0.5	

Fuel System		
Fuel Consumption @100% ESP	L/h	293
Fuel Consumption @100% PRP	L/h	261
Fuel Consumption @75% PRP	L/h	199
Fuel Consumption @50% PRP	L/h	139
Fuel Tank Capacity (Open)	L	1000
Fuel Tank Capacity (Silent)	L	1000

Starter System		
Start Motor Voltage	V	24
No. of Batteries	2	

Cooling System		
Coolant capacity-engine	L	160.9
Thermostat adjusting temperature	℃	82-93
Max.coolant cycling resistance exterior engine	68.9kPa	
Min. Pressure Cap	kPa	96

Exhaust system		
Max.exhaust temperature	℃	/
Exhaust gas flow	L/s	3728
Max.back pressure	kPa	10

Alternator Date-- Stamford		
Alternator Model	S6L1D-G4	
Phase	3	
Voltage V	400	
Prime Power KW	1000	
Pole	4	
Excitation System	elf-excited, Brushless	
No. of Bearing	3	
Power Factor	0.8	
Wiring Connection	3 Phases, 4 Wires	
Insulation Grade	H/H	
Protection Grade	IP23	
Voltage Regulation %	±0.5	

IG1375C

INDUSTRIAL RANGE
POWER BY CUMMINS

IGNT

Controller Specifications

Control Panel Date-- Deepsea DSE6120

- | | |
|--|--|
| ● Built in PLC logic programming | ● Generator/load current monitoring and protection |
| ● Generator voltage detection | ● Fuel pump control function |
| ● Mains voltage detection | ● Can connect to all expansion modules |
| ● Generator/load power detection (kW, kVA, kVAR, pf) | ● Capable of graded loading |
| ● Generator overload protection (kW) | ● Engine speed protection |
| ● Equipped with manual closing and opening functions | ● Engine preheating |
| ● Start gen-set when the battery voltage is low | ● Engine starts rapidly&stops rapidly |
| ● LCD and LED alarm indication | ● Custom remote start signal |

Generator Specifications

Standard Configuration

- 50°C radiator for belt driven fan
- 12/24V charging alternator
- One set of air/fuel/oil filters
- Chassis with integrated fuel tank
- Emergency stop button
- Anti-vibration shock absorbers
- Main circuit breaker/ MCCB
- Auto control system
- User manual

Optional Configuration

- Battery charger
- Engine pre-heater
- Alternator pre-heater
- PMG/ AREP/ MAUX
- Water-oil separator
- Inside automatic transfer switch/ ATS box
- Grounding copper rod
- Remote control system
- Switch box

Warranty of Generator Set

Cummins Engine

One year or 1000 running hours whichever comes first

Generator

One year or 1000 running hours whichever comes first

Email: ignt@igntpower.com

Web: www.igntpower.com