


# IG34C

INDUSTRIAL RANGE  
POWER BY CUMMINS

# IGNT

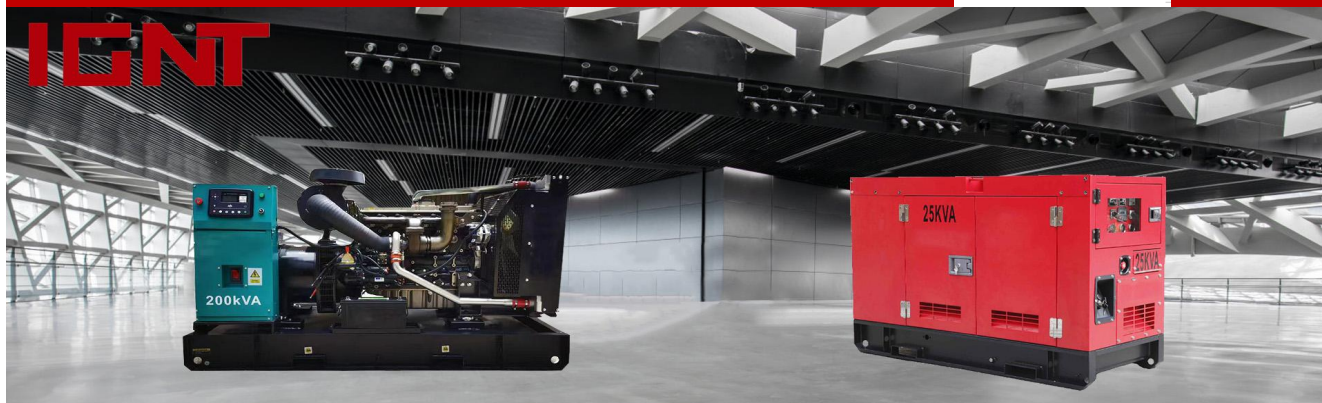

## POWER DEFINITION

PRP: Prime Power is required for continuous operation under variable load and infinite operating hours per year.

ESP: Standby power refers to the ability of the generator to operate at varying loads in the event of power outage, with an annual operating time of up to 200h.

## STANDARD USAGE CONDITIONS:

1. Altitude: below 1000 meters;
2. Environmental temperature: 25 °C
3. Relative humidity: 30%

## ABOUT NOISE:

The noise level of the generator largely depends on the installation conditions and usage environment, so it is not possible to specify the noise value in manual. The noise value we provide is based on laboratory testing and is for reference.

## QUALIFICATION STANDARD

IGNT POWER generator set complies with ISO and CE standards, which also include the following certification standards:  
ISO 1400:2015 Environmental System;  
ISO 45001:2018 Safety System;  
ISO 9001:2015 Quality System

SERVICE		PRP	ESP
Power	KVA	31	34
Power	KW	25	28
Standard Voltage	V	400/230	
Available Voltage	v	380/220	415/240
Rated Current	A	45	
Frequency/Speed	HZ/RPM	50/1500	

## Weight and Dimension

Dimension			Open	Silent
Length	(L)	mm	1850	2340
Width	(W)	mm	800	1000
Height	(H)	mm	1260	1450
Net Weight		KG	762	1112
Fuel Tank		L		58

# IG34C

INDUSTRIAL RANGE  
POWER BY CUMMINS

# IGNT

## Engine Specifications

General Engine Data -- CUMMINS CCEC		
Engine Model	4B3, 9-G12	
Governer	E	
Fuel Injection	Direct	
No. of Cylinders	4	
Displacement (L)	3.9	
Bore* Stroke (mm)	102*120	
Compression Ratio	18	
Rated Net Power(KW)	25	
Cooling Way	Water-cooled	

Air intake system		
Maximum intake air restriction		
with heavy duty air cleaner:		
Air Filter	Type	Dry

Lubrication System		
Engine Oil Capcity	L	10.9
Oil Consumption	%	0.5-1
Intake air flow	L/s	43

## Alternator Specifications

Alternator Date-- IGNT		
Alternator Model	IA184G	
Phase	3	
Voltage (V)	400	
Prime Power (KVA)	31	
Pole	4	
Excitation System	Self-excited, Brushless	
No. of Bearing	1	
Power Factor	0.8	
Wiring Connection	3 Phases, 4 Wires	
Insulation Grade	H/H	
Protection Grade	IP23	
Voltage Regulation (%)	±0.5	

Fuel System		
Fuel Consumption @100% ESP	L/h	10.1
Fuel Consumption @100% PRP	L/h	9.4
Fuel Consumption @75% PRP	L/h	7.5
Fuel Consumption @50% PRP	L/h	5.5
Fuel Tank Capacity (Open)	L	140
Fuel Tank Capacity (Silent)	L	70

Starter System		
Start Motor Voltage	V	24
No. of Batteries	2	

Cooling System		
Engine Coolant Capacity	L	10.9
Total coolant capacity	L	15.2
Max. Water Temp.	°C	/
Cooling air flow	L/s	0.959

Exhaust system		
Max.exhaust temperature	°C	370
Exhaust gas flow	L/s	81.9
Max. Back Pressure	kPa	10

Alternator Date-- Stamford		
Alternator Model	SOL2-P1	
Phase	3	
Voltage V	400	
Prime Power KVA	31	
Pole	4	
Excitation System	Self-excited, Brushless	
No. of Bearing	3	
Power Factor	0.8	
Wiring Connection	3 Phases, 4 Wires	
Insulation Grade	H/H	
Protection Grade	IP23	
Voltage Regulation %	±0.5	

# IG34C

INDUSTRIAL RANGE  
POWER BY CUMMINS

# IGNT

## Controller Specifications

Control Panel Date-- Deepsea DSE6120

● Built in PLC logic programming	● Generator/load current monitoring and protection
● Generator voltage detection	● Fuel pump control function
● Mains voltage detection	● Can connect to all expansion modules
● Generator/load power detection (kW, kVA, kVAr, pf)	● Capable of graded loading
● Generator overload protection (kW)	● Engine speed protection
● Equipped with manual closing and opening functions	● Engine preheating
● Start gen-set when the battery voltage is low	● Engine starts rapidly&stops rapidly
● LCD and LED alarm indication	● Custom remote start signal

## Generator Specifications

Standard Configuration

- 50°C radiator for belt driven fan
- 12/24V charging alternator
- One set of air/fuel/oil filters
- Chassis with integrated fuel tank
- Emergency stop button
- Anti-vibration shock absorbers
- Main circuit breaker/ MCCB
- Auto control system
- User manual

Optional Configuration

- Battery charger
- Engine pre-heater
- Alternator pre-heater
- PMG/ AREP/ MAUX
- Water-oil separator
- Inside automatic transfer switch/ ATS box
- Grounding copper rod
- Remote control system
- Switch box

## Warranty of Generator Set

Cummins Engine

One year or 1000 running hours whichever comes first

Generator

One year or 1000 running hours whichever comes first

Email: [ignt@igntpower.com](mailto:ignt@igntpower.com)

Web: [www.igntpower.com](http://www.igntpower.com)