


# IG1513M

INDUSTRIAL RANGE  
POWER BY SME

# IGNT

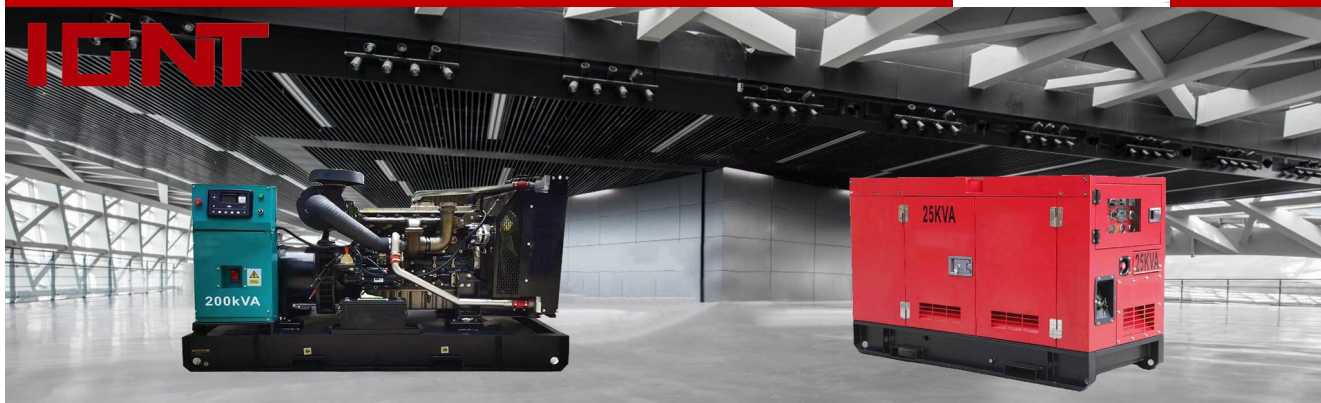

## POWER DEFINITION

PRP: Prime Power is required for continuous operation under variable load and infinite operating hours per year.

ESP: Standby power refers to the ability of the generator to operate at varying loads in the event of power outage, with an annual operating time of up to 200h.

## STANDARD USAGE CONDITIONS:

1. Altitude: below 1000 meters;
2. Environmental temperature: 25 °C
3. Relative humidity: 30%

## ABOUT NOISE:

The noise level of the generator largely depends on the installation conditions and usage environment, so it is not possible to specify the noise value in manual. The noise value we provide is based on laboratory testing and is for reference.

## QUALIFICATION STANDARD

IGNT POWER generator set complies with ISO and CE standards, which also include the following certification standards:  
ISO 1400:2015 Environmental System;  
ISO 45001:2018 Safety System;  
ISO 9001:2015 Quality System

SERVICE		PRP	ESP
Power	KVA	1375	1513
Power	KW	1100	1210
Standard Voltage	V	400/230	
Available Voltage	v	380/220	415/240
Rated Current	A	1985	
Frequency/Speed	HZ/RPM	50/1500	

## Weight and Dimension

Dimension			Open	Silent
Length	(L)	mm	4500	6096
Width	(W)	mm	2210	2438
Height	(H)	mm	2380	2592
Net Weight	KG			
Fuel Tank	L			

# IG1513M

INDUSTRIAL RANGE  
POWER BY SME

IGNT

## Engine Specifications

### General Engine Data -- SME

Engine Model	S12R-PTA2-C
Governer	E
Number of Turbocharger	4
No. of Cylinders	12
Displacement (L)	49.03
Bore* Stroke (mm)	170*180
Compression Ratio	13.5
Rated Net Power(KW)	1110
Approximate engine weight	5400kg

### Air intake system

Air cleaner	Donaldson EGB 20x 2 pcs
Turbocharger	Mitsubishi type TD13L-48QRC(47)
Air cooler	Plated element type

### Lubrication System

Engine Oil Capacity	L	480
Oil pressure at main gallery	0.5-0.65Mpa	
oil cooler	Water cooled corrugated type	

## Alternator Specifications

### Alternator Data-- IGNT

Alternator Model	IA734B
Phase	3
Voltage (V)	400
Prime Power (KW)	1100
Pole	4
Excitation System	If-excited, Brushless
No. of Bearing	1
Power Factor	0.8
Wiring Connection	3 Phases, 4 Wires
Insulation Grade	H/H
Protection Grade	IP23
Voltage Regulation (%)	±0.5

### Fuel System

Fuel Consumption @100% ESP	L/h	311
Fuel Consumption @100% PRP	L/h	280
Fuel Consumption @75% PRP	L/h	211
Fuel Consumption @50% PRP	L/h	150
Fuel Tank Capacity (Open)	L	/
Fuel Tank Capacity (Silent)	L	/

### Starter System

Start Motor Voltage	V	24
No. of Batteries		2

### Cooling System

Water pump	Belt drive centrifugal type
Capacity of water pump	1500min-1, 1650L/min
Thermostat	Wax pellet type Open at 71-85 °C

### Control system

Connector	Loose supply
Potentiometer	Not supply
Magnetic pick up	With connector

### Alternator Data-- Stamford

Alternator Model		S6L1D-H4
Phase		3
Voltage	V	400
Prime Power	KW	1100
Pole		4
Excitation System		Self-excited, Brushless
No. of Bearing		3
Power Factor		0.8
Wiring Connection		3 Phases, 4 Wires
Insulation Grade		H/H
Protection Grade		IP23
Voltage Regulation	%	±0.5

# IG1513M

INDUSTRIAL RANGE  
POWER BY SME

# IGNT

## Controller Specifications

### Control Panel Date-- Deepsea DSE6120

- |  |  |
|--|--|
| ● Built in PLC logic programming                     | ● Generator/load current monitoring and protection |
| ● Generator voltage detection                        | ● Fuel pump control function                       |
| ● Mains voltage detection                            | ● Can connect to all expansion modules             |
| ● Generator/load power detection (kW, kVA, kVAr, pf) | ● Capable of graded loading                        |
| ● Generator overload protection (kW)                 | ● Engine speed protection                          |
| ● Equipped with manual closing and opening functions | ● Engine preheating                                |
| ● Start gen-set when the battery voltage is low      | ● Engine starts rapidly&stops rapidly              |
| ● LCD and LED alarm indication                       | ● Custom remote start signal                       |

## Generator Specifications

### Standard Configuration

- 50°C radiator for belt driven fan
- 12/24V charging alternator
- One set of air/fuel/oil filters
- Chassis with integrated fuel tank
- Emergency stop button
- Anti-vibration shock absorbers
- Main circuit breaker/ MCCB
- Auto control system
- User manual

### Optional Configuration

- Battery charger
- Engine pre-heater
- Alternator pre-heater
- PMG/ AREP/ MAUX
- Water-oil separator
- Inside automatic transfer switch/ ATS box
- Grounding copper rod
- Remote control system
- Switch box

## Warranty of Generator Set

### Cummins Engine

One year or 1000 running hours whichever comes first

### Generator

One year or 1000 running hours whichever comes first

Email: [ignt@igntpower.com](mailto:ignt@igntpower.com)

Web: [www.igntpower.com](http://www.igntpower.com)